

www.continental-industry.com


Continental SAM

DN 152 DH 254 IN 25

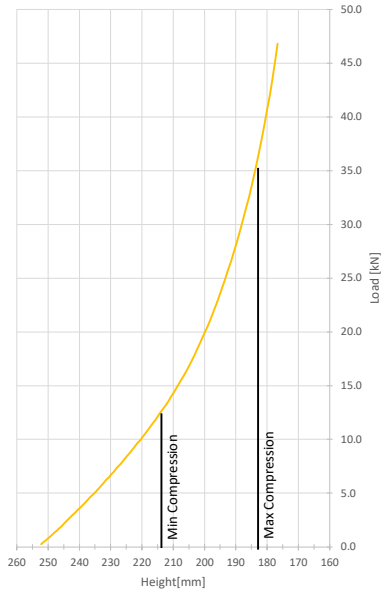

Compression [%]	15	20	22.5	25	27.5
Load [kN]	12.1	18.3	22.9	28.1	35.7
Height [mm]	215	202	196	190	183
Spring Rate [kN/m]	406	615	785	987	1355
Effective Deflection [mm]	30	30	29	28	26
Natural Frequency [Hz]	2.9	2.9	2.9	3.0	3.1
Maximum OD [mm]	167	172	175	178	181
Weight [Kg]	4.60				

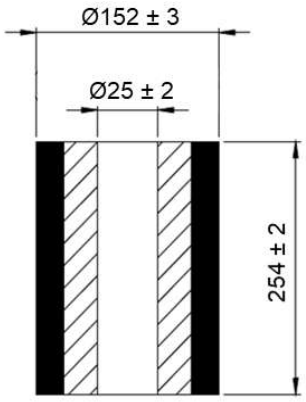



Continental SAM is the solution for spring replacement and vibration isolation.
With its resistant, durable and economical design it helps to cut costs in nearly all industrial applications.

- better working conditions due to a dramatically reduced noise level
- reduced downtimes
- compact design
- high load-bearing capacity
- reliable even in damp or corrosive conditions
- maintenance-free
- safe due to the absence of moving parts
- reliable even in extreme temperatures (-40°F to 167°F, -40°C to +75°C)

ContiTech Advanced Dynamics Solutions
30165 Hannover · Phone +49 (0)511 938-72
www.continental-industry.com

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2021 ContiTech AG. All rights reserved. For complete information go to: www.contitech.de/discl_en