

www.continental-industry.com


Continental SAM

DN 191 DH 203 IN 89

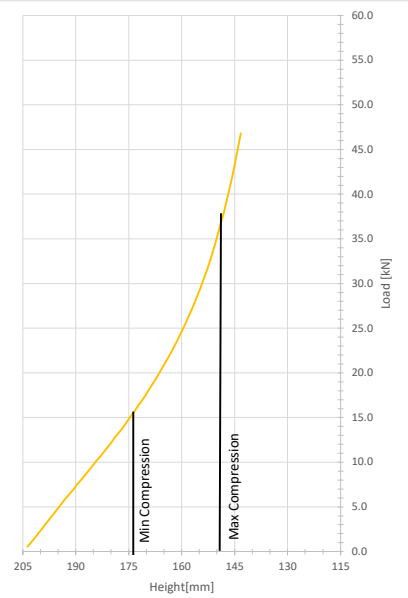

Compression [%]	15	20	22.5	25	27.5
Load [kN]	15.4	21.6	25.5	30.3	36.7
Height [mm]	174	164	159	154	149
Spring Rate [kN/m]	560	710	860	1096	1495
Effective Deflection [mm]	28	30	30	28	25
Natural Frequency [Hz]	3.0	2.9	2.9	3.0	3.2
Maximum OD [mm]	207	212	214	217	220
Weight [Kg]	4.46				

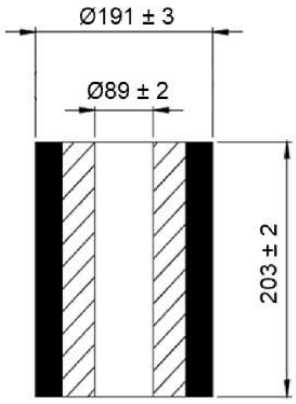



Continental SAM is the solution for spring replacement and vibration isolation.
With its resistant, durable and economical design it helps to cut costs in nearly all industrial applications.

- better working conditions due to a dramatically reduced noise level
- reduced downtimes
- compact design
- high load-bearing capacity
- reliable even in damp or corrosive conditions
- maintenance-free
- safe due to the absence of moving parts
- reliable even in extreme temperatures (-40°F to 167°F, -40°C to +75°C)

ContiTech Advanced Dynamics Solutions
30165 Hannover · Phone +49 (0)511 938-72
www.continental-industry.com

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2021 ContiTech AG. All rights reserved. For complete information go to: www.contitech.de/discl_en